

QUICK-FIX grease coupler

Revolutionary new design

Easy coupling with DIN 71412 grease fittings.

No jaws.
7 retaining balls.

Made of steel.

Knurled body.

NEW



Characteristics

Revolutionary grease coupler. Smooth lock-on mechanism that eases grease fitting coupling and uncoupling. This durable, jaw-free coupler includes seven retaining balls, assuring a proper sealing between grease fitting DIN 71412 and grease pump up to a pressure of 700 bar.

Application

1. Easy coupling.

2. Release security lock and smoothly uncouple QUICK-FIX.




Greasing tasks have never been that **easy, clean, safe and fast!**

Technical data

WETTED PARTS	carbon steel, stainless steel
MAX. PRESSURE	700 bar (10.000 psi)
WEIGHT	40 g

Dimensions

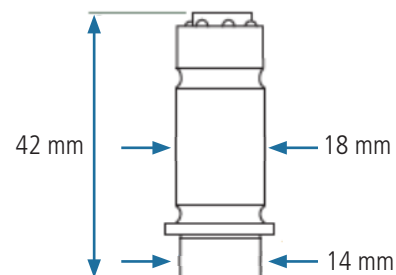

Types and accessories

INLET THREAD	M 10 x 1	1/8" BSP	1/8" NPT
QUICK-FIX GREASE COUPLER	121060400	121060401	121060
HIGH-PRESSURE HOSE WITH QUICK-FIX	41395	41394	--
QUICK-FIX SALES DISPLAYS	41386 with 10 x QUICK-FIX M 10 x 1	41388 with 10 x QUICK-FIX 1/8" BSP	--
	41387 with 5 x QUICK-FIX M 10 x 1 and 5 x QUICK-FIX 1/8" BSP	--	--



Sales-display: Image similar.


Also available in combination with different professional grease guns. Please ask for more information.

QUICK-FIX Profi-Mundstück

Revolutionäres neues Design

Einfaches Ankoppeln mit DIN 71412 Schmiernippeln.

Hergestellt aus Stahl.

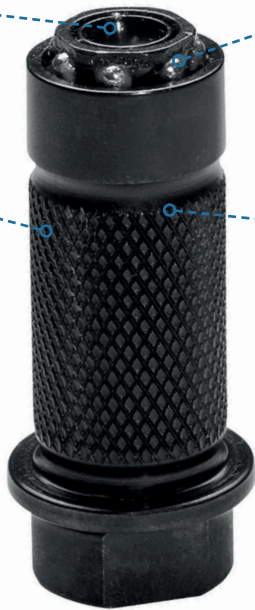

Ohne Backen. Mit 7 Stahlkugeln.

Gerändelte Oberfläche.



Eigenschaften

Revolutionäres QUICK-FIX Profi-Mundstück für alle Hydraulikschmiernippel nach DIN und SAE. Neu entwickelte 7-Kugel „QUICK-FIX“-Technik für ein reibungsloses An- und Abkoppeln bis max. 700 bar Arbeitsdruck.

Anwendung

1. Ankoppeln.



2. Sicherheitsverriegelung lösen und QUICK-FIX abkoppeln.




ABSCHMIEREN WAR NOCH NIE SO EINFACH!

Technische Daten

MEDIENBERÜHRENDE TEILE	Carbonstahl, rostfreier Stahl
MAX. DRUCK	700 bar (10.000 psi)
GEWICHT	40 g

Maße

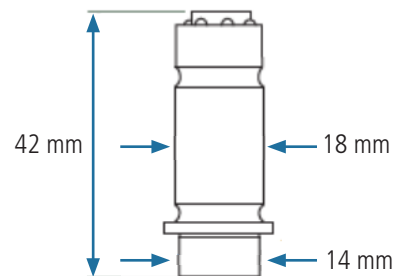

Ausführungen und Zubehör

ANSCHLUSSGEWINDE	M 10 x 1	R 1/8"	1/8" NPT
QUICK-FIX PROFI-MUNDSTÜCK	121060400	121060401	121060
HOCHDRUCKSCHLAUCH MIT QUICK-FIX	41395	41394	--
QUICK-FIX VERKAUFTS-DISPLAYS	41386 mit 10 x QUICK-FIX M 10 x 1	41388 mit 10 x QUICK-FIX R 1/8"	--
	41387 mit 5 x QUICK-FIX M 10 x 1 und 5 x QUICK-FIX R 1/8"		--

Auch kombinierbar mit unseren Profi-Fettpressen. Wir beraten Sie gerne!



Verkaufs-Display: Abbildung ähnlich.